

FT2267/6



THREADED CARTRIDGE MOUNTED CHECK VALVES

They allow free flow in one direction, shutting-off the return flow in the opposite direction. Release pressure 0,5 bar.

dimensions


Type	A UNI4534	ØB	C	H	CH	OR 1	OR 2	Weight kg
14	M22x1,5	19	9,5	49	8	3056	115	0,80
38	M27x2	24	10,5	56	10	3075	3068	0,140
12	M33x2	29	13	67	10	3093	3087	0,265
34	M42x2	38	17	80,5	12	4125	4112	0,545

materials

Boby	AISI 316 stainless steel
Check valves	AISI 316 stainless steel
Spring	AISI 316 stainless steel
Screw plug	AISI 316 stainless steel
OR seal	Viton

example for ordering

Code	Type
FT 2267/6	12

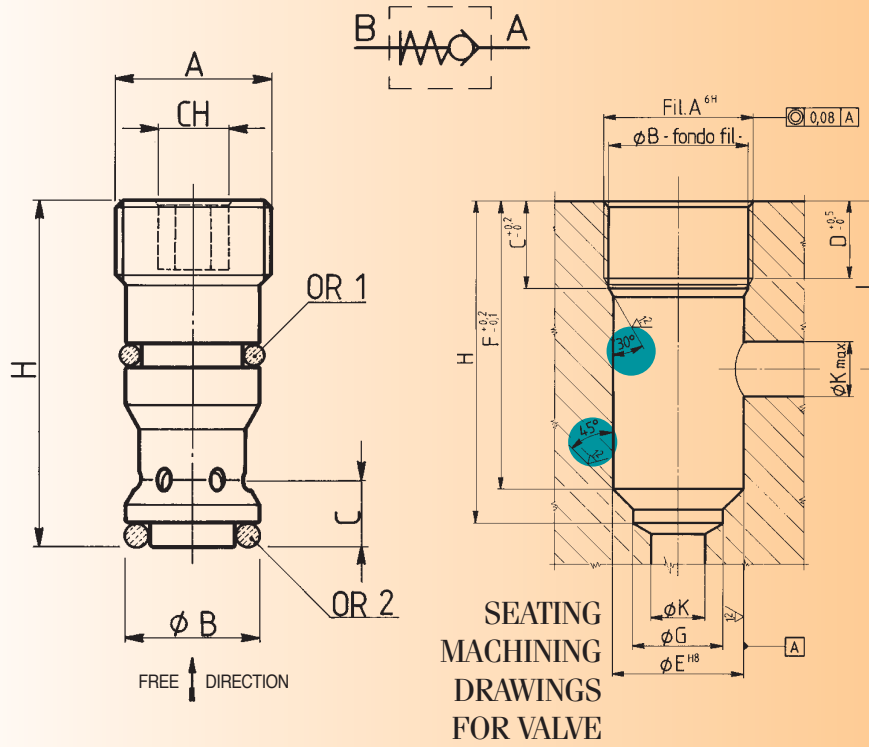

seating valve dimensions

Type	A UNI 4534	ØB	C	D	ØE	F	ØG	H	ØK	min	L	max
14	M22x1,5	20,5	16,5	13,5	19	45,5	10	52	8	33,5	36	
38	M27x2	25	18	16	24	52,5	15	59	10	36,5	40	
12	M33x2	31	21	17	29	63,5	20	71	12	45	49	
34	M42x2	40	25	20	38	76	26	85,5	15	52	59	

technical data

Type	Max. working pressure bar	Min. burst. pressure bar	Working temp. °C	Filtration grade µm
14	320	1300	-20° / +130°C	25
38	320	1300	-20° / +130°C	25
12	320	1300	-20° / +130°C	25
34	320	1300	-20° / +130°C	25
100	320	1300	-20° / +130°C	25

