



DPT 200

Differential Pressure Transmitter for Process Industry with HART®-Communication

accuracy according to IEC 60770:
0.075 % FSO

Differential pressure

from 1 mbar up to 20 bar

static pressure

max. 400 bar

Output signal

2-wire: 4 ... 20 mA

Special characteristics

- ▶ static over pressure 400 bar
- ▶ rangeability max. 100:1
- ▶ aluminium die cast case
- ▶ HART®-communication
- ▶ output signal: linear or square root extraction






Optional versions

- ▶ ATEX-version
Ex ia = intrinsically safe version
Ex d = flameproof enclosure
- ▶ LCD

The differential pressure transmitter DPT 200 has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

The possibility passes different pressure seals at the DPT 200 adding with different membrane materials to reach an optimal adaptation to the application.

Preferred areas of use are

-  Oil and gas industry
-  Chemical and petrochemical industry
-  Energy Industry
-  Food and beverage
-  Paper Industry



Differential pressure ranges						
sensor	Type	A	B	C	D	E
Differential pressure range dp [bar]		10 mbar	60 mbar	400 mbar	2.5 bar	20 bar
Setting limits (offset and span in this range freely adjustable)		-10 ... 10 mbar	-60 ... 60 mbar	-400...400 mbar	-2.5 ... 2.5 bar	-20 ... 20 bar
Lowest permissible span		1 mbar	2 mbar	4 mbar	25 mbar	200 mbar
Permissible static pressure		70 bar	160 bar	160 bar	160 bar	160 bar
optional		-	-	400 bar	400 bar	400 bar
rangeability TD (with respect to the differential pressure range dp)		10:1	30:1	100:1	100:1	100:1

Output signal / Supply	
Standard	2 wire: 4 ... 20 mA / $V_S = 12 \dots 42 V_{DC}$ (with LC-Display / $V_S = 15 \dots 42 V_{DC}$) ATEX-version: / $V_S = 15 \dots 28 V_{DC}$
Error signal	Namur NE43 high / low (adjustable)
Performance	
Accuracy ¹	turn-down $\leq 10:1$: $\leq \pm 0.075\%$ FSO turn-down $> 10:1$: $\leq \pm [0.075 \times \text{turn-down}] \%$ FSO with turn-down = nominal pressure range / adjusted range (FSO = Full Scale Output)
Influence supply	$\leq 0.001\%$ FSO / 10 V
Influence static pressure	Type A: $\pm [0.015 \text{ mbar} + 0.1\% \text{ of the adjusted range}] / 40 \text{ bar}$ Type B: $\pm [0.06 \text{ mbar} + 0.075\% \text{ of the adjusted range}] / 160 \text{ bar}$ Type C: $\pm [0.2 \text{ mbar} + 0.05\% \text{ of the adjusted range}] / 160 \text{ bar}$ Type D: $\pm [1.25 \text{ mbar} + 0.05\% \text{ of the adjusted range}] / 160 \text{ bar}$ Type E: $\pm [10 \text{ mbar} + 0.05\% \text{ of the adjusted range}] / 160 \text{ bar}$
Influence installation position	max. 400 Pa (can be compensated about zero-point correction)
Long term stability	Type A: $\leq \pm (0.5\% \times \text{differential pressure range dp}) / \text{year}$ at reference conditions Type B: $\leq \pm (0.2\% \times \text{differential pressure range dp}) / \text{year}$ at reference conditions Type C - E: $\leq \pm (0.1\% \times \text{differential pressure range dp}) / \text{year}$ at reference conditions
Permissible load	without LC-display : $R_{\max} = [(V_S - 12 \text{ V}) / 0.023 \text{ A}] \Omega$ with LC-display : $R_{\max} = [(V_S - 15 \text{ V}) / 0.023 \text{ A}] \Omega$ HART®-communication: $R = 230 \Omega \dots 600 \Omega$
Response time T90	Type A: appr. 1.6 s Type B: appr. 0.4 s Type C: appr. 0.2 s Type D: appr. 0.2 s Type E: appr. 0.1 s
damping	electronic : 0.1 ... 60 s plus response time T90

Thermal effects (Offset and Span)	
Temperature range -20 ... +65°C	Type A: $\pm [0.45 \times \text{turn-down} + 0.25]\%$ of the adjusted range Type B: $\pm [0.30 \times \text{turn-down} + 0.20]\%$ of the adjusted range Type C - E: $\pm [0.20 \times \text{turn-down} + 0.10]\%$ of the adjusted range
Temperature range -40 ... -20°C or +65 ... +100°C	Type A: $\pm [0.45 \times \text{turn-down} + 0.25]\%$ of the adjusted range Type B: $\pm [0.30 \times \text{turn-down} + 0.20]\%$ of the adjusted range Type C - E: $\pm [0.20 \times \text{turn-down} + 0.10]\%$ of the adjusted range

Permissible temperatures	
Environment / storage	without display : -40 ... 85 °C with display : -20 ... 65 °C (85°C without function)
Media wetted parts	silicone oil : -40 ... 100 °C (information: +125°C short time, max. 30 min.) Fluorolube oil : -40 ... 100 °C (information: +125°C short time, max. 30 min.)

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function

Mechanical stability	
One-sided overload	According to the maximum static pressure of differential pressure sensor
Vibration	5 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6
Shock	100 g / 1 msec according to DIN EN 60068-2-27

Materials		
Pressure port / flange	standard	stainless steel 304 / 1.4301
	option	stainless steel 316 / 1.4401 others: on request
Diaphragm	standard	stainless steel 316L / 1.4404
	option	Hastelloy® C-276 others: on request
Vent and dump valves Blanking plugs	standard	stainless steel 304 / 1.4301
	option	stainless steel 316 / 1.4401
Bolts and nuts	standard	stainless steel 304 / 1.4301
	option	stainless steel 316 / 1.4401 others: on request
Manufacturing label		stainless steel 316 / 1.4401
Housing	standard	aluminum die cast with epoxy painting (blue)
	option	stainless steel 304 / 1.4301 others: on request
Seals (media wetted)	standard	FKM (-30...250°C)
	option	NBR (-40...125°C), PTFE (-180...250°C) others: on request
Filling fluids	standard	Silicone oil (-40...125°C)
	option	Fluorolube oil (-40...125°C) others: on request

Explosion protection		
Approvals	IBExU 14 ATEX 1273 X / IECEX IBE 16.0005X	
AX18-DPT200	II 1/2G Ex ia IIC T4 Ga/Gb II 2D Ex ia IIC T 85 °C Db	
Safety technical maximum values for intrinsically safe version	Pi = 660 mW, Ui = 28 V, Ii = 93 mA, Ci 29,7 nF, Li negligible	
Approval	IBExU 15 ATEX 1110 X / IECEX IBE 16.0006X	
AX18B-DPT200	Zone 1: II 2G Ex db IIC T6 Gb	
Permissible temperatures for environment	Ex ia: -40 ... 60 °C Ex d: -40 ... 65 °C	

Miscellaneous		
Display (optionally)	Type	: LCD
	Lines	: 2
configuration	Digits	: 8
	Bargraph	: 0...100%
Mounting bracket (optionally)	rotatability	: yes, 90°-steps and / or by turn of the electronic case
	material	CF8M or stainless steel 304 / 1.4401 weight 0,45 kg (inclusive bolts and nuts)
Ingress protection	IP 67	
Installation position	any	
Weight	Differential pressure transmitter: approx. 3 kg (depending on version)	
Current consumption	approx. 23 mA	
CE-conformity	EMC Directive: 2014/30/EU	
ATEX Directive	2014/34/EU	

Connections		
Electrical connection	terminal clamps in clamping chamber (for cable-Ø max.2.5 mm²)	
Process connections	Standard	internal thread 1/4" - 18 NPT / fixing 7/16 UNF
	option	internal thread 1/4" - 18 NPT / fixing M10 oval flange 1/2" NPT internal thread adapter M20x1,5 others: on request



DPT 200



Differential Pressure Transmitter

Technical Data



Pin configuration	
Electrical connection	terminal clamps
Supply + (Vs+)	+
Supply - (Vs-)	-
Test +	TEST+
Ground	⏏

Dimensions (in mm)

DPT 200 mit Display

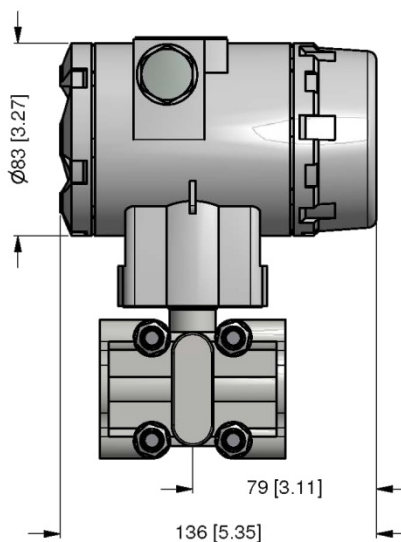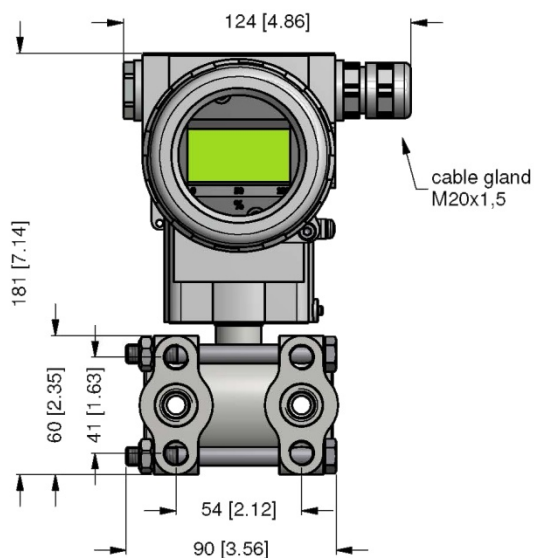

DPT 200 ohne Display

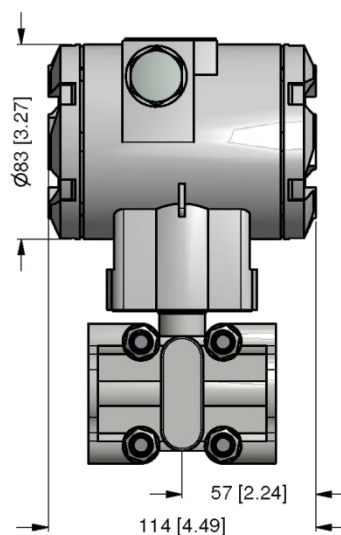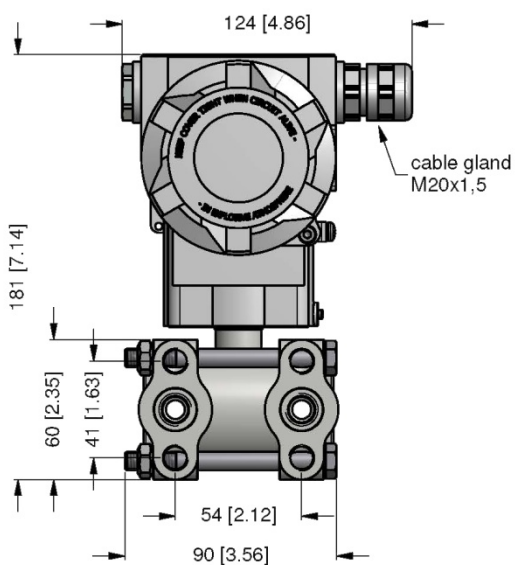

HART® is a registered trade mark of HART Communication Foundation; Hastelloy® is a brand name of Haynes International Inc.
Windows® is a registered trade mark of Microsoft Corporation

© 2016 BD/SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

DPT 200_E_270716

Tel: +49 (0) 92 35 / 98 11- 0
Fax: +49 (0) 92 35 / 98 11- 11

www.bdsensors.com
info@bdsensors.de

BD SENSORS
pressure measurement

Ordering code DPT 200

DPT 200

[illegible]

¹ HART® is a registered trade mark of HART Communication Foundation

² Hastelloy® is a brand name of Haynes International Inc.