



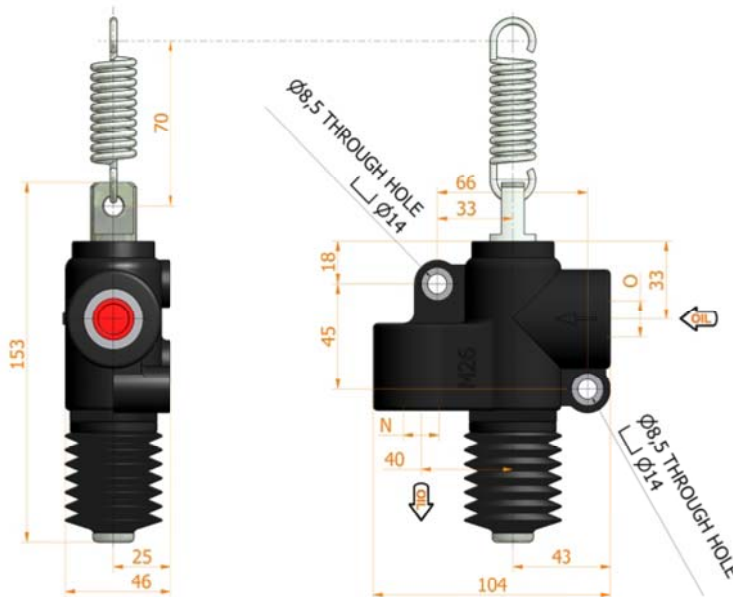

VFC 3/8 GAS nc

normally closed
2 position
with mechanic control
for tipping trucks



Specifications:



- Cast iron body
- Piston treated with Niploy
- White zinc plated external parts
- Standard colour black

| N-O GAS | A mm | B mm | C mm | D ° | E ° | FLOW liters/min | PRESSURE BAR | | MASS KG | CODE |
|------------|---------|---------|---------|--------|--------|--------------------|--------------|-----|------------|-----------|
| | | | | | | | OPTIMAL | MAX | | |
| 3/8 | -- | -- | -- | -- | -- | 60 | -- | 250 | 1,700 | 6200.0011 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |



VFC 1/2 GAS nc

normally closed
2 position
with mechanic control
for tipping trucks

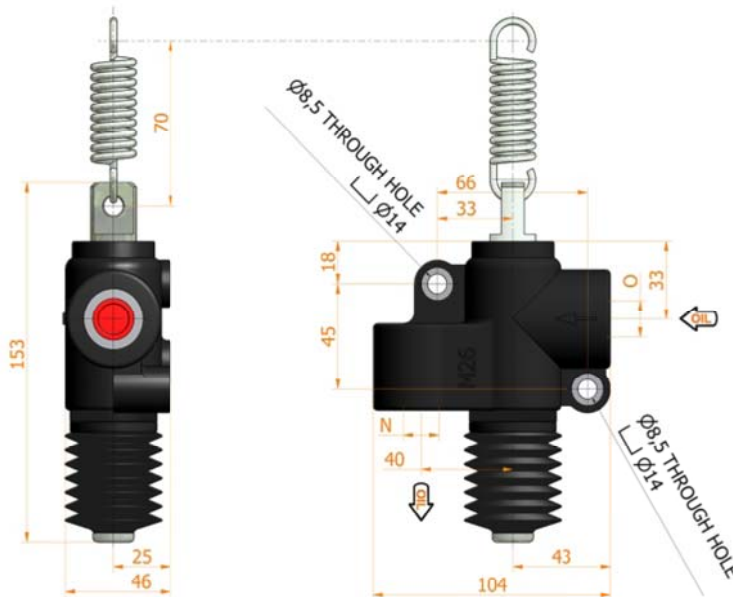



Specifications:

- Cast iron body
- Piston treated with Niploy
- White zinc plated external parts
- Standard colour black

| N-O GAS | A mm | B mm | C mm | D ° | E ° | FLOW liters/min | PRESSURE BAR | | MASS KG | CODE |
|------------|---------|---------|---------|--------|--------|--------------------|--------------|-----|------------|-----------|
| | | | | | | | OPTIMAL | MAX | | |
| 1/2 | -- | -- | -- | -- | -- | 80 | -- | 250 | 1,800 | 6200.0013 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

VFC 3/4 GAS nc

normally closed
2 position
with mechanic control
for tipping trucks

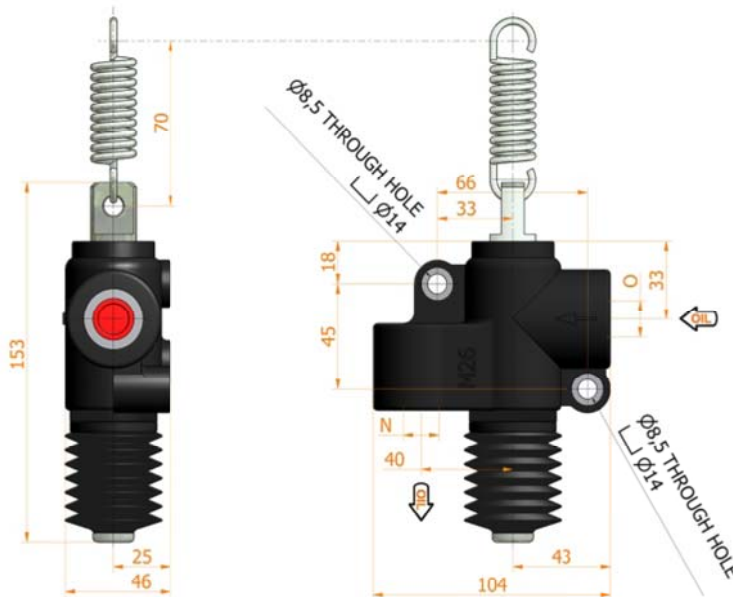

Specifications:



- Cast iron body
- Piston treated with Niploy
- White zinc plated external parts
- Standard colour black

| N-O GAS | A mm | B mm | C mm | D ° | E ° | FLOW liters/min | PRESSURE BAR | | MASS KG | CODE |
|------------|---------|---------|---------|--------|--------|--------------------|--------------|-----|------------|-----------|
| | | | | | | | OPTIMAL | MAX | | |
| 3/4 | -- | -- | -- | -- | -- | 100 | -- | 250 | 1,900 | 6200.0015 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |



VFC 1 GAS nc

normally closed
2 position
with mechanic control
for tipping trucks

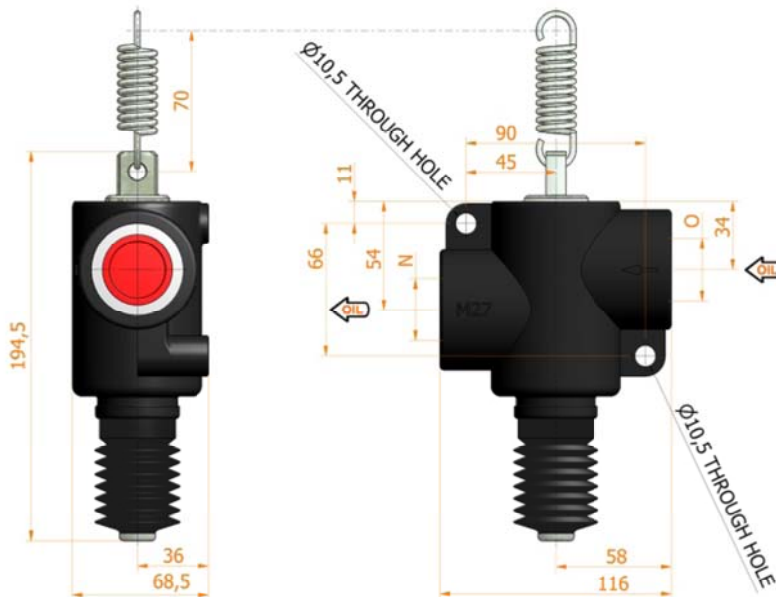

Specifications:

- Cast iron body
- Piston treated with Niploy
- White zinc plated external parts
- Standard colour black

| N-O GAS | A mm | B mm | C mm | D ° | E ° | FLOW liters/min | PRESSURE BAR | | MASS KG | CODE |
|------------|---------|---------|---------|--------|--------|--------------------|--------------|-----|------------|-----------|
| | | | | | | | OPTIMAL | MAX | | |
| 1 | -- | -- | -- | -- | -- | 140 | -- | 200 | 2,500 | 6200.0017 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |